

AK-1716K5 / AK-1716K5-IP



- 17" LCD Monitor with LED Backlight
- 16 Port CAT.5 KVM
- Installation Depth 559mm only



AK-1716K6 is a 17" Monitor-Keybaord-Drawer with LED backlight. A value keyboard with number block and touchpad and the integrated 16 Port CAT.5 KVM-switch are completing the external design. The casing conforms the 1U Standard, is easily installed and mountable with the included mounting kit.

The device can optional be equipped with an IP-module.



Specifications

- The corresponding dongle **are included with delivery.**
- Cascadable up to a port capacity of 256 ports by tree-chaining
- Computer selection by push buttons, Keyboard -Hotkeys and OSD-Menu
- On-Screen-Display und system notification as a Pop-Up
- Automatic Power ON/OFF pushing the console back to the rack
- Supports all USB suitable operating systems: for example DOS, Windows Series / Server 2008 / Server 2013, Linux, MacOS, etc.
- Numeric LED status indicators for clear display of port status


Properties

- 1U 17" LCD console, 571mm total depth
- Stepless, adjustable angle from 0 to 105° with high quality torque hinges
- Easy one-man-assembly with the included installation angles
- Integrated 16-port CAT.5 KVM-switch
- Adjustable depth: 560mm to 900mm (Standard)
- Chromed metal handle
- Practical knurled screws
- High graphic resolution, up to 1280 x 1024 with 60Hz

Keyboard versions

Available in following versions: German (DE), US-English (US), UK-English (UK), French (FR), Spanish (SP), Italian (IT). Swiss / German (CH) and swedish / finnish (SWE/FI)

Versions available on request: Turkish (TK) and Russian(RU)

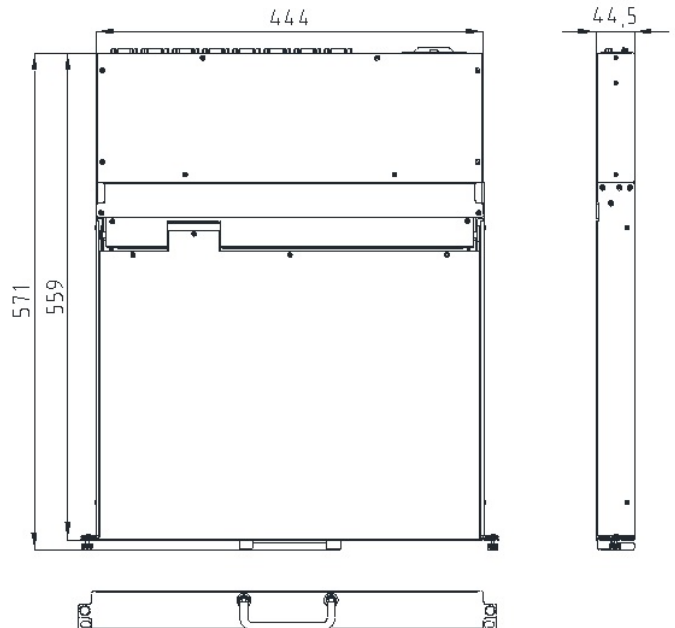

Technical data:

Connections KVM	Graphic / Keyboard / Mouse	16 x RJ-45
	Console(remote)	1 x RJ-45 (only with IP version)
	Console (local)	2 x USB-A
	Power supply	1 x DC-12V
Connections (Standard)	1x VGA und 1x USB Standard	16 x KD-DON-USB Standard
	1x VGA und 2x PS/2 Optional	KD-DON-PS/2 Optional
Switch	LCD settings	5 Pressure switch
	ON / OFF	1 Pressure switch
	OFF (LCD folded)	1 Semi-covert pressure switch
LED-Display panel	Operation	1 x green/red
	Number	1 x blue
	Capital letters	1 x blue
	Scroll	1 x blue
LED-Display KVM	Port/Switch	16 green (Port)
Emulation	Keyboard/ Mouse	USB & PS/2
	Display	JA
Port selection	Hotkey / OSD	
Graphic	17" LCD	1280 x 1024
	Colors	16,2 Mio.
	Frame Rate	H: 31,0 KHz. – 81,0 KHz. V: 56,0 KHz. – 76,0 KHz.
	Viewing angle	H: 140° / V: 130°
	Bandwith	140 Mhz.
	Brightness	300 cd/m ²
	Contrast	700 : 1
	Reaktion time	4 ms.
	Pixel pitch	0,264mm (H) x 0,264mm (V)
Backlight	LED	
Input values	100 V. – 240 V. AC, 48 Hz – 62 Hz	
Output values	DC 12V., 4,16A	
Power consumption	230 V / 14,6 Watt	
Certification	RoHS, RoHS2, CE	
Environment	Operating temperature	-10 - 50°C
	Storage temperature	-20 – 60°C
	Humidity	0 – 80% relative humidity (non condensing)
Physical properties	Casing	High performance steel
	Color	RAL 9005
	Weight	17.6 kg incl. angles
	Dimension (L x W x H) w/o handle	555 x 450 x 44,5mm (19" / 1U)
	Dimension (L x W x H) w. handle	567 x 450 x 44,5mm (19" / 1U)
Packaging	Weight	18.6 kg
	Dimension (L x W x H)	74 x 62 x 18 cm